JAVIN

SWING GATE

Stainless Steel • Automatic

Wide Lane Gate

Introduction

JS3018 designed for wide lane with low security access provides a comfortable access such as those who are carrying large bags, baby stroller, elderly and disabled access. These gates can easily match with existing barrier. The passage width are available at 600mm (single barrier) and 900mm, 1200mm (double barrier). JAVIN wide lane access gate and side gate can form part of your existing combination of security gates or be used as stand alone solution.

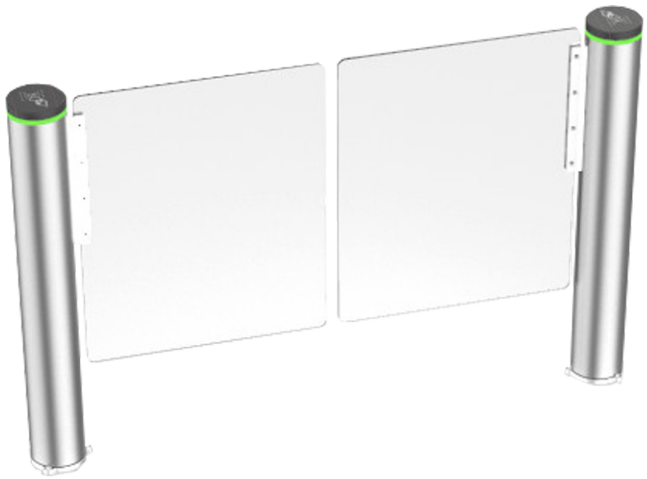

JS3018

Functionality

- Slimmest, modern design and elegant frameless wing
- Strong visual LED provide clear instuction
- Easy to combine to existing security gates
- Extra wide access from 900 (single barrier) and 1200mm (double barrier)
- Smooth, swinging motion barrier
- Easy to integrate most access control

TECHNICAL SPECIFICATIONS

General Specification

Operation	Automatic. Fail-safe (In the event of power outage, swing door automatic open)
Opening / Closing Speed	0.9 second
Direction	Single or bi-directional
Working Environment	Indoor or outdoor
LED Light	Entry or No-Entry display direction arrows
Passage Per Minute	20~35 persons
Opening / Closing Cycle	5,000,000
Working Temperature	Indoor/outdoor (use a canopy cover) -10°C—50°C, Relative humidity: ≤90%
Communication Interface	RS485

Physical

Dimensions	140(W) x 1050(D) x 980(H)mm
Housing Material	SUS304 stainless steel optional to use SUS316L
Input Interface	Dry contact signal or +12V signal or pulse

Electrical

Working voltage	AC230 ±10% 50/60HZ ±10%
Electronic motor	Brushless motor 24V 40W with fully auto model

Dimension

Front View

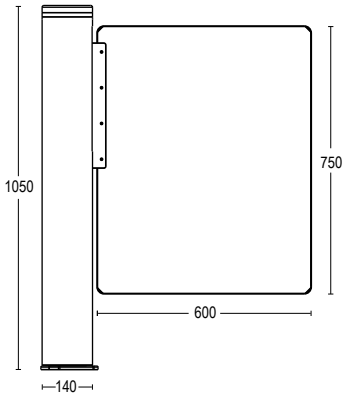

Side View



*All specification, drawing and product info are subject to change without prior notice.