JAVIN

FLAP GATE

Stainless Steel • Automatic

Be Bold And Beautiful

Introduction

Designed curved cabinet to allow for a quick, sliding motion of the wings, as well as showcasing intuitive color LED lights, guiding users from entry through the authorisation and into the exit. JAVIN flap gate has proven to be a popular choice for those who are unwilling to compromise on security or design.

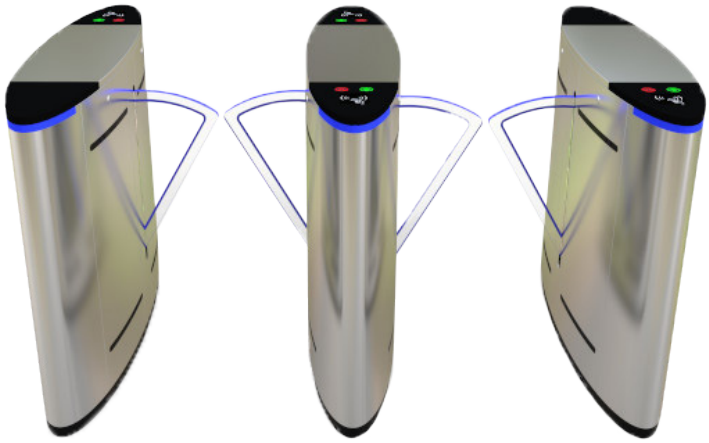

JF2100

Functionality

- Flexible lane configuration
- Strong visual LED provide clear instruction
- Easy to integrate most access control
- Intuitive sensors detect tailgating
- Smooth, swinging motion gate
- Slim, tapered cabinets with ergonomic design and small footprint

TECHNICAL SPECIFICATIONS

General Specification

Operation	Automatic. Fail-safe (In the event of power outage, flap wing automatic open)
Opening / Closing Speed	0.9 second
Direction	Single or bi-directional
Working Environment	Indoor or outdoor
LED Light	Entry or No-Entry display direction arrows
Passage Per Minute	20~35 persons
Opening / Closing Cycle	3,000,000
Working Temperature	Indoor/outdoor (use a canopy cover) -10°C—50°C, Relative humidity: ≤90%
Communication Interface	RS485

Physical

Dimensions	300(W) x 1400(D) x 980(H)mm
Housing Material	SUS304 stainless steel optional to use SUS316L
Input Interface	Dry contact signal or +12V signal or pulse

Electrical

Working voltage	AC230 ±10% 50/60HZ ±10%
Electronic motor	Brushless motor 24V 40W with fully auto model

Dimension

Front View

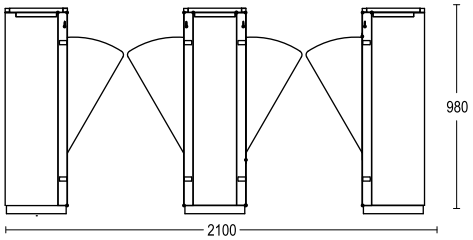

Top View

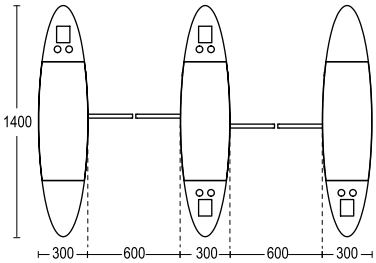

Side View



*All specification, drawing and product info are subject to change without prior notice.