JAVIN

SLIDING GATE

Stainless Steel • Automatic

Maximum Safety

Introduction

JAVIN sliding gate are ideal for those who are unwilling to compromise on high security and maximum personal safety. With it height 1800mm wing, immediately separates large number of people. Asthetically modern and contemporary rapid seperation of persons for maximum personal safety.



Functionality

- » High separation with rapid passage of persons
- » Flexible lane configuration
- » Easy to integrate most access control
- » Intuitive sensors detect tailgating
- » Smooth, sliding motion gate
- » Automatic opening in case of power cut or emergency

TECHNICAL SPECIFICATIONS

JL5060

General Specification

Operation	Automatic. Fail-safe (In the event of power outage, sliding door automatic open)
Opening / Closing Speed	0.9 second
Direction	Single or bi-directional
Working Environment	Indoor or outdoor
LED Light	Entry or No-Entry display direction arrows
Passage Per Minute	20~35 persons
Opening / Closing Cycle	3,000,000
Working Temperature	Indoor/outdoor (use a canopy cover) -10°C—50°C, Relative humidity: ≤90%
Communication Interface	RS485

Physical

Dimensions	350(W) x 1400(D) x 980(H)mm
Housing Material	SUS304 stainless steel optional to use SUS316L
Input Interface	Dry contact signal or +12V signal or pulse

Electrical

Working voltage	AC230 ±10% 50/60HZ ±10%
Electronic motor	Brushless motor 24V 40W with fully auto model

Dimension

Front View

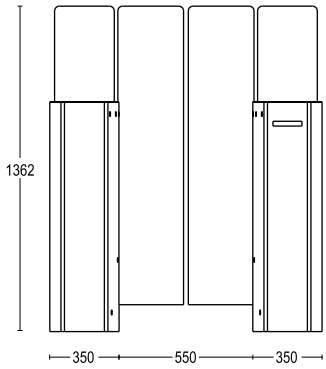

Side View

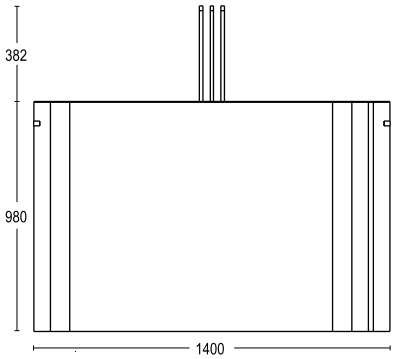

*All specification, drawing and product info are subject to change without prior notice.