JAVIN

# TRIPOD TURNSTILE

Stainless Steel • Automatic

## For Large Number of People

### Introduction

Automatic stainless steel tripod arm and robust stainless steel housings, able to withstand improper use. Suitable for stadiums, loading bays, residential and public access. JAVIN tripod turnstile are suitable at sport stadiums, malls or public areas. It can operate under large number of people at single or bi-directional.

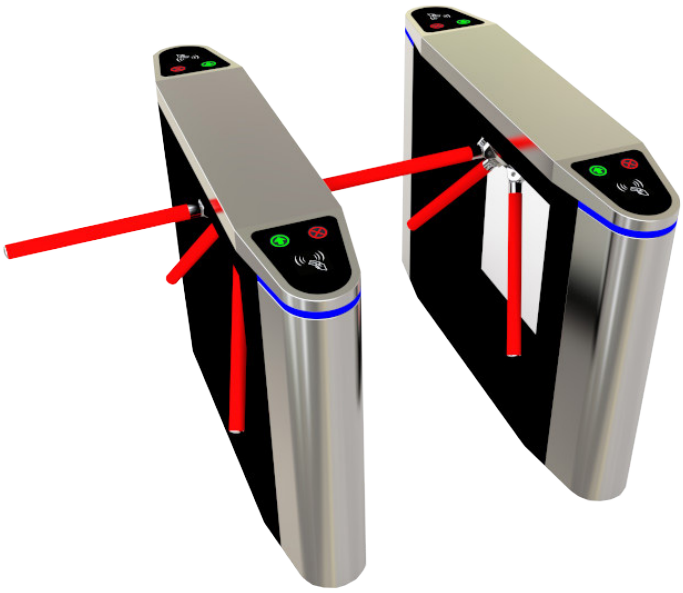

### Functionality

- Robust turnstiles
- Easy integrate most access control
- Build from high quality stainless steel
- Automatic drop arm in case of power cut or emergency
- Highly visible LED sign
- Suitable for indoor and outdoor with shelter

## TECHNICAL SPECIFICATIONS

**JT1066**

### General Specification

| | |
|---|---|
| Operation | Automatic. Fail-safe (In the event of power outage, drop arm) |
| Opening / Closing Speed | 0.9 second |
| Direction | Single or bi-directional |
| Working Environment | Indoor or outdoor |
| LED Light | Entry or No-Entry display direction arrows |
| Passage Per Minute | 20~30 persons |
| Opening / Closing Cycle | 5,000,000 |
| Working Temperature | Indoor/outdoor (use a canopy cover) -10°C—50°C, Relative humidity: ≤90% |
| Communication Interface | RS485 |

### Physical

| | |
|---|---|
| Dimensions | 280(W) x 1400(D) x 980(H)mm |
| Housing Material | SUS304 stainless steel optional to use SUS316L |
| Input Interface | Dry contact signal or +12V signal or pulse |

### Electrical

| | |
|---|---|
| Working voltage | AC230 ±10% 50/60HZ ±10% |
| Electronic motor | Brushless motor 24V 40W with fully auto model |

### Dimension

Front View




Top View




Side View




*All specification, drawing and product info are subject to change without prior notice.